

Amplifiers

Model 75S6G18C

Features:

- 75 W CW, 6 - 18 GHz
- Class A design
- 100% mismatch tolerant
- Built-in fault monitoring and protection
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service
- Low acoustical noise

Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing
- CDMA, W-CDMA, TDMA, GSM, UWB, WiMAX etc.

To view our full amplifier portfolio visit:
www.arworld.us/amplifiers

AR RF/Microwave Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215.723.8181
info@arworld.us
www.arworld.us
ISO 9001:2015 Certified
ISO 17025 :2017 Accredited



The Model 75S6G18C is a solid-state, Class A design, self-contained, air-cooled, broadband power amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. It will provide a minimum of 75 W across its operating bandwidth of 6.0 - 12.0 GHz and 65 W from 12.0 - 18.0 GHz. Protection from input overdrive beyond 0 dBm is provided as well as protection from various failure conditions including over-temperature and power supply faults.

A front panel display indicates the operational status and fault conditions. All amplifier control functions, and status indications are available remotely using GPIB/IEEE-488, RS-232, fiber-optic serial, USB, or Ethernet. Interface connectors are located on the back panel. Local and remote operation is managed by a switch on the front panel.

This is a multiple purpose amplifier. The low level of spurious signals and linearity make it ideal for use as a driver in testing wireless and communication components and subsystems. By covering such a wide bandwidth, it is suitable for a variety of communication technologies such as CDMA, W-CDMA, TDMA, GSM, UWB, WiMAX etc.

The export classification for this equipment is 3A001. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.



Model 75S6G18C

- 75 W, 6.0 - 12.0 GHz
- 65 W, 12.0 - 18.0 GHz

Electrical Specifications					
Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output (6.0 - 12.0 GHz)	PSAT	75	110	>180	W
Rated Power Output (12.0 - 18.0 GHz)	PSAT	65	100	>140	W
Input for Rated Output	Pin			1.0	mW
				0	dBm
Power Output @ 3 dB Compression (6.0 - 12.0 GHz)	P3dB	75	110	>180	W
Power Output @ 3 dB Compression (12.0 - 18.0 GHz)	P3dB	65	100	>140	W
Power Output @ 1 dB Compression (6.0 - 12.0 GHz)	P1dB	60	80	>120	W
Power Output @ 1 dB Compression (12.0 - 18.0 GHz)	P1dB	50	70	>110	W
Operating Frequency	BW	6.0		18.0	GHz
Gain (Small Signal)		50	54	58	dB
Gain Reduction Adjustment (when below compression)		10	15	20	dB
Flatness	ΔG		± 2.5	± 3.5	dB
Input Impedance	Z in		50		Ohm
			2.0:1	2.5:1	VSWR
Output Impedance	Z out		50		Ohm
3 rd Order Intercept	IP3		+54		dBm
Harmonic Distortion @ 75 W, 6.0 - 12.0 GHz, @ 65W, 12.0 - 18.0 GHz	H2, H3		-25	-20	dBc
Power Consumption	PD			1200	W
Modulation Capability	AM, FM or Pulse				

Absolute Maximum Rating				
Exceeding any of the limits listed here may result in permanent damage to the device.				
Parameter	Minimum	Typical	Maximum	Unit
RF Drive		0	+13	dBm
RF Load		1:1	∞	VSWR
RF Load Reflected Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry.			100	%
AC Power (single phase)	100		240	VAC
	47		63	Hz
Ambient Temperature	+5	+25	+40	°C
Storage Temperature	-20		+50	°C
Altitude			2000	m
Shock/Vibration	Normal Truck Transport			



Model 75S6G18C


- 75 W, 6.0 - 12.0 GHz
- 65 W, 12.0 - 18.0 GHz

Mechanical Specifications		
Parameters		Unit
Dimensions (With Cabinet) (W x H x D)	50.2 x 20.6 x 63.8	cm
	19.8 x 8.1 x 25.1	in
Dimensions (No Cabinet) – 4U for 19" Rack	48.3 x 18.8 x 63.8	cm
	19.0 x 7.0 x 25.1	in
Weight (With Cabinet)	35	kg
	77	lb
Weight (No Cabinet)	25.9	kg
	57	lb
Cooling	Forced air (self-contained fans) Side inlets / rear outlet $\Delta t = +7^{\circ}\text{C}$ (typical)	
Acoustical Noise (Measured @ 1 meter from the front)	60 (typical)	dBA

Regulatory Compliance	
Type	Standard
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	3A001

Connector interfaces	
Function	Type
RF input	N female (50 Ω)
RF output	N female (50 Ω)
IEEE-488	24-pin female
RS-232	9-pin subminiature D female
RS-232 (fiber optic)	ST
USB 2.0	Type B
Ethernet	RJ-45
Interlock	15-pin subminiature D female

Ordering Options



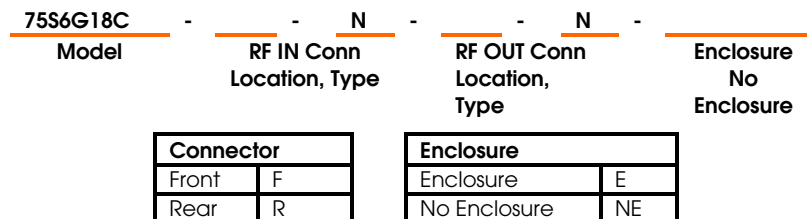


Model 75S6G18C




- 75 W, 6.0 - 12.0 GHz
- 65 W, 12.0 - 18.0 GHz

Envelope Drawing

75S6G18C with Cabinet

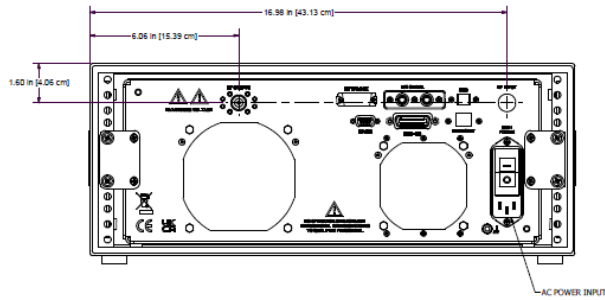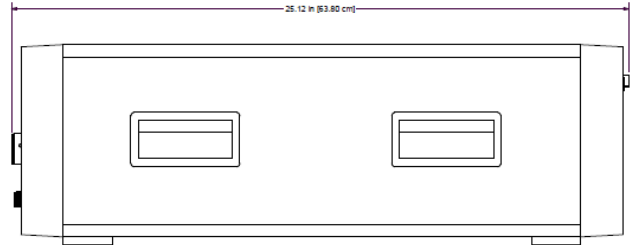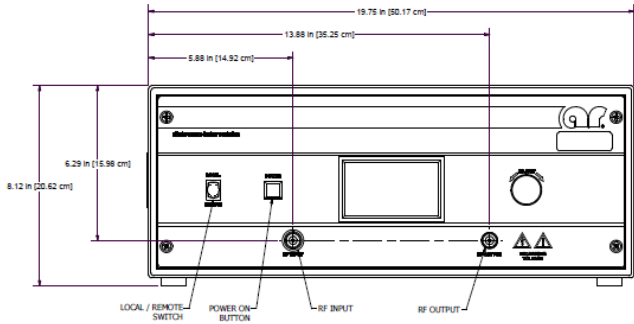


75S6G18C without Cabinet

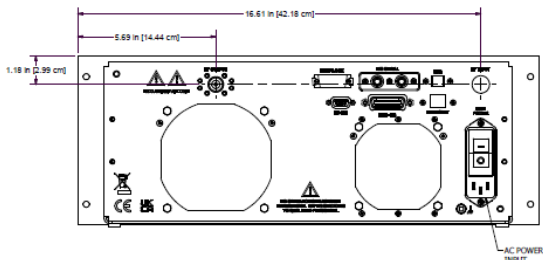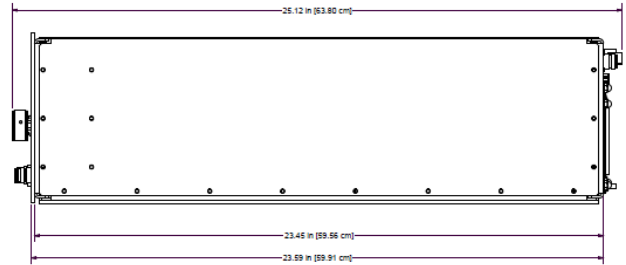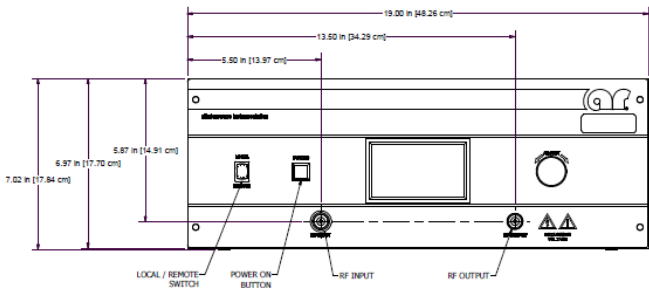


Model 75S6G18C

- 75 W, 6.0 - 12.0 GHz
- 65 W, 12.0 - 18.0 GHz

TYPICAL PSAT POWER @ 0 dBm INPUT

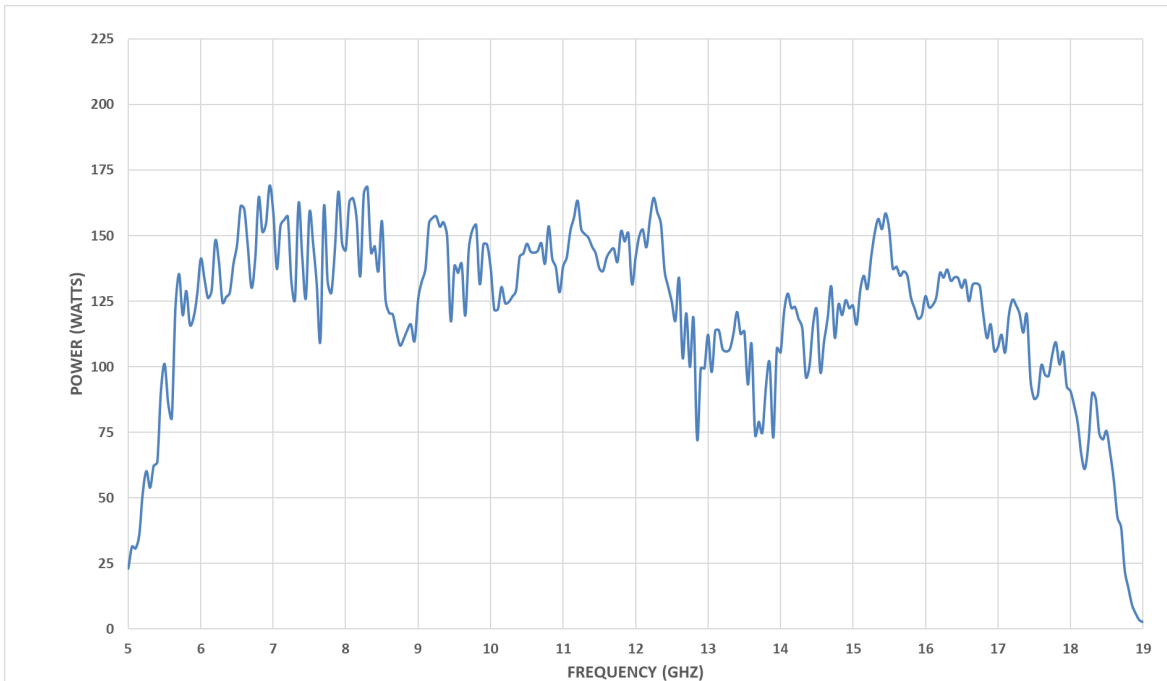


TYPICAL POWER @ P3 dB COMPRESSION

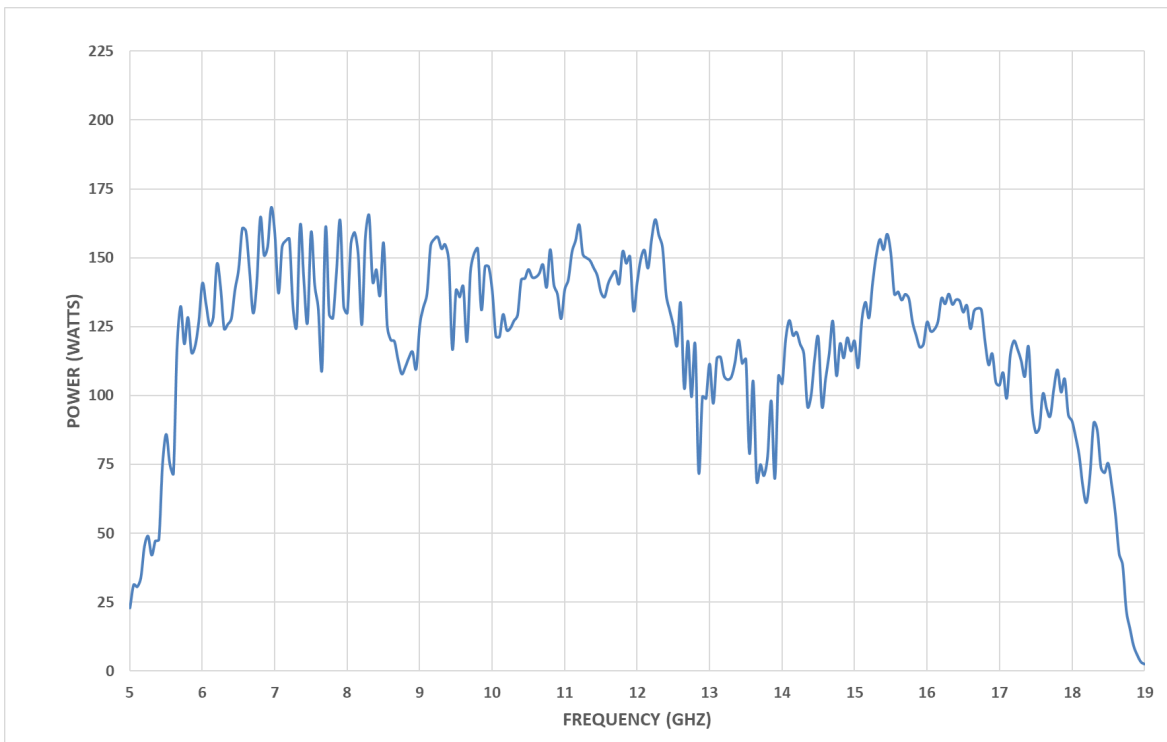


Model 75S6G18C

- 75 W, 6.0 - 12.0 GHz
- 65 W, 12.0 - 18.0 GHz

TYPICAL POWER @ P1 dB COMPRESSION

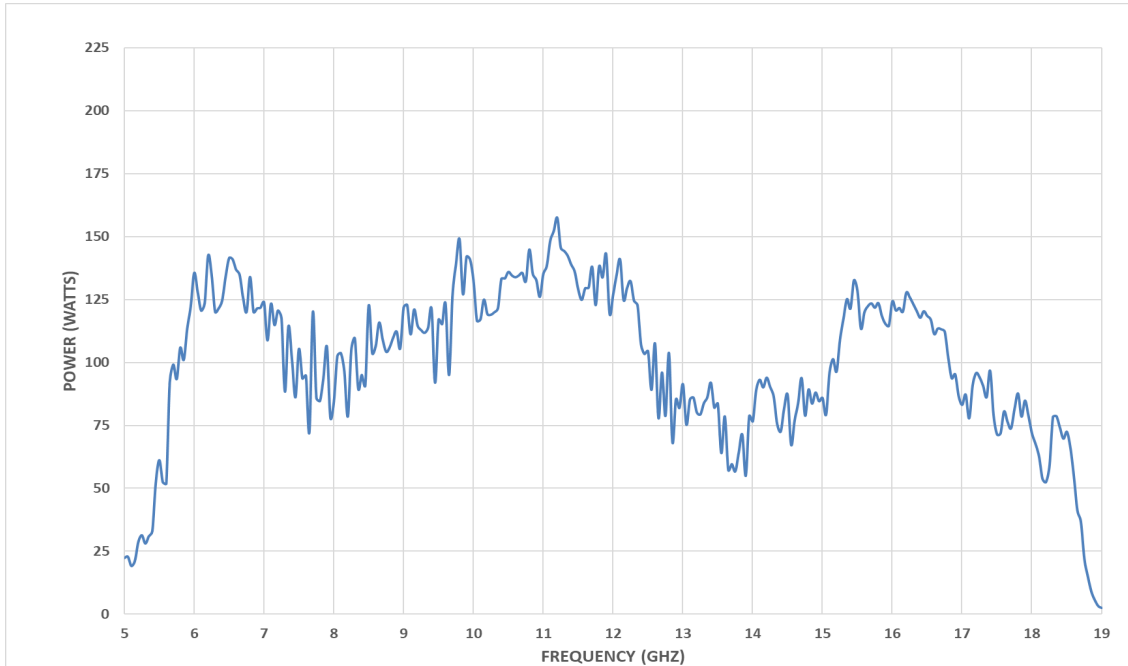


TYPICAL SMALL SIGNAL GAIN @ -20 dBm INPUT

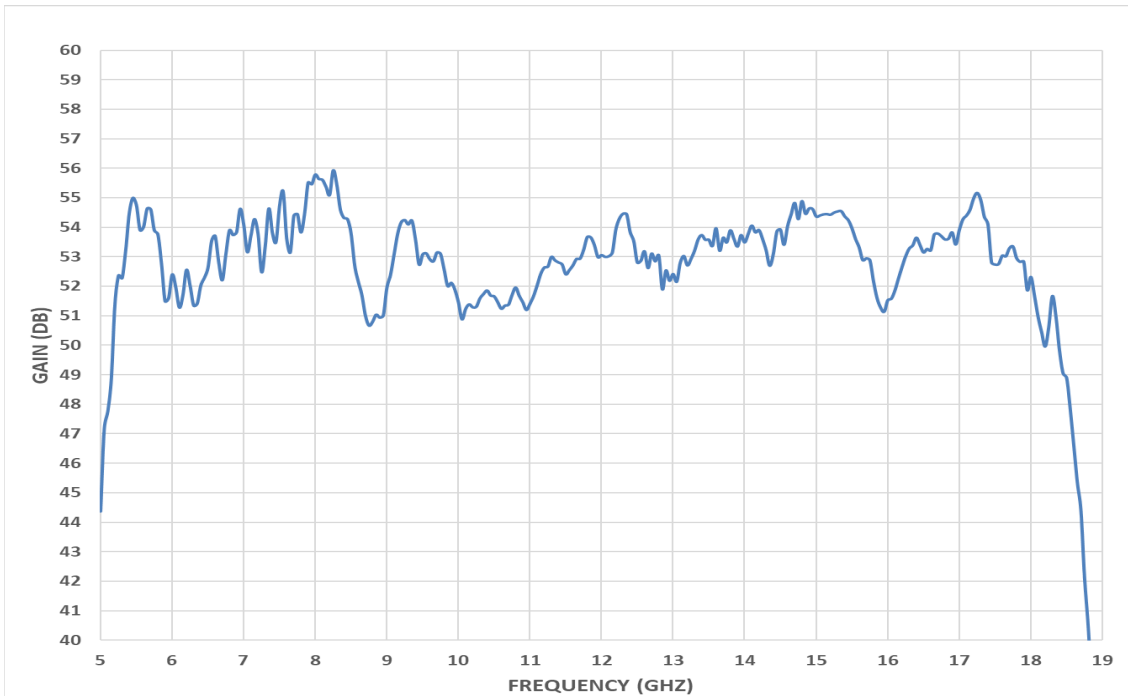


Model 75S6G18C

- 75 W, 6.0 - 12.0 GHz
- 65 W, 12.0 - 18.0 GHz

TYPICAL 2nd HARMONIC @ 75 W OUTPUT

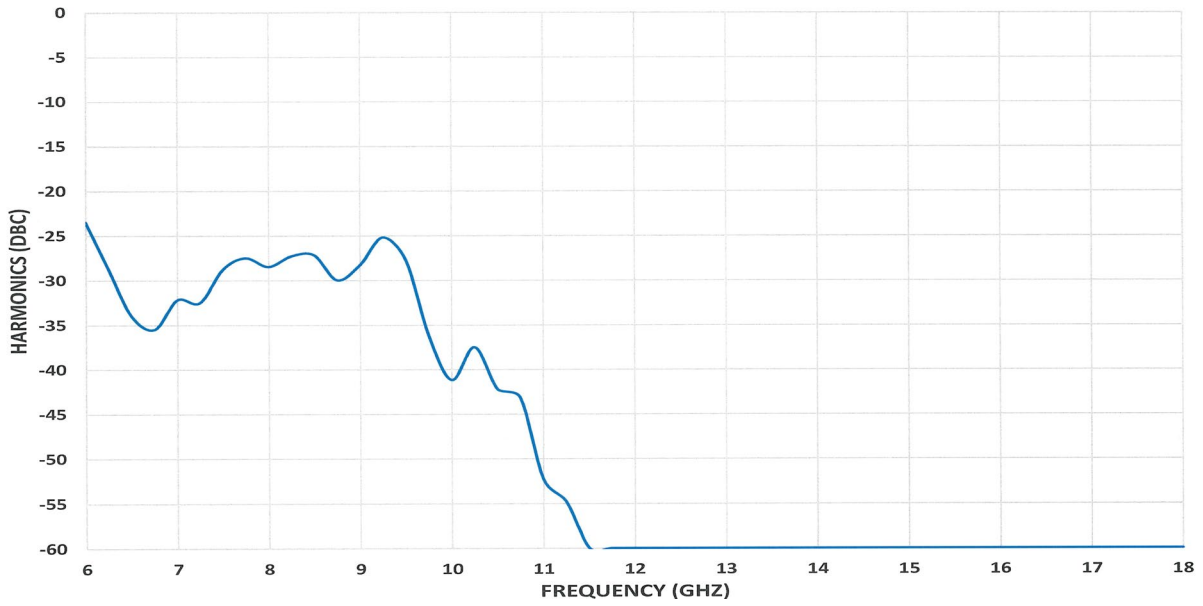


TYPICAL 3rd HARMONIC @ 75 W OUTPUT

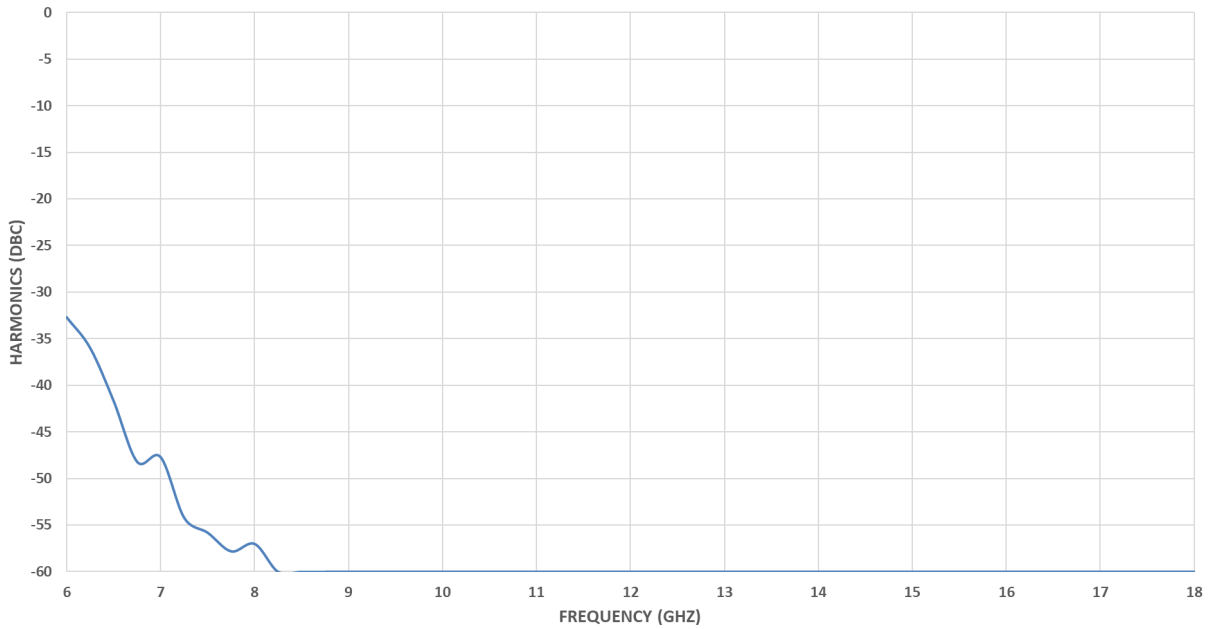


Model 75S6G18C

- 75 W, 6.0 - 12.0 GHz
- 65 W, 12.0 - 18.0 GHz

TYPICAL INPUT VSWR

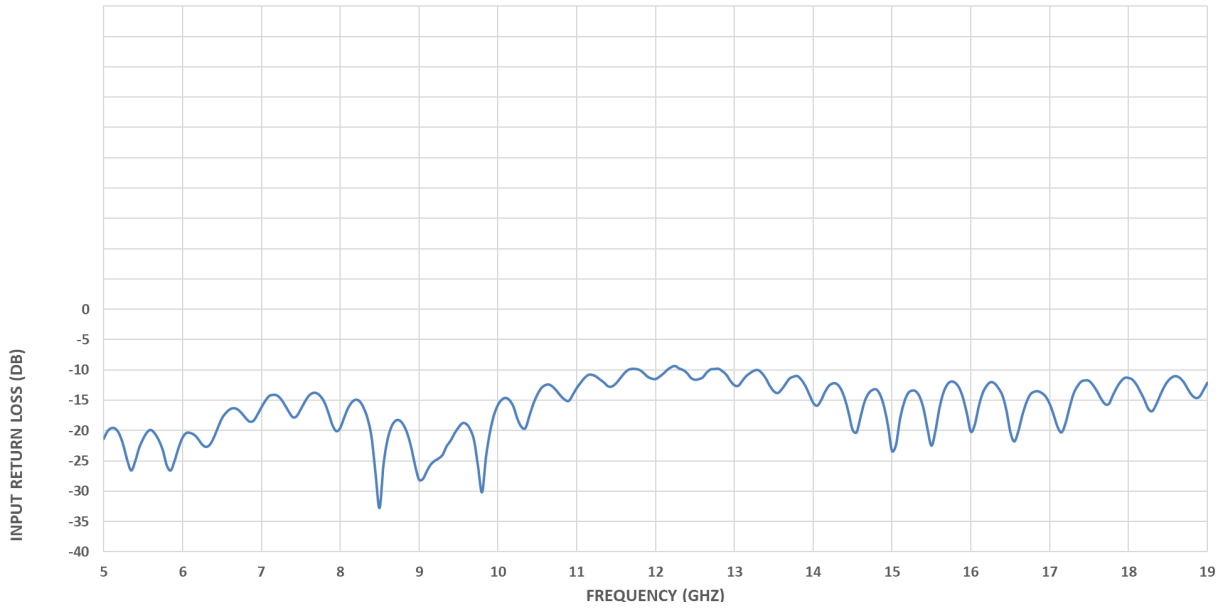

TYPICAL NOISE FIGURE

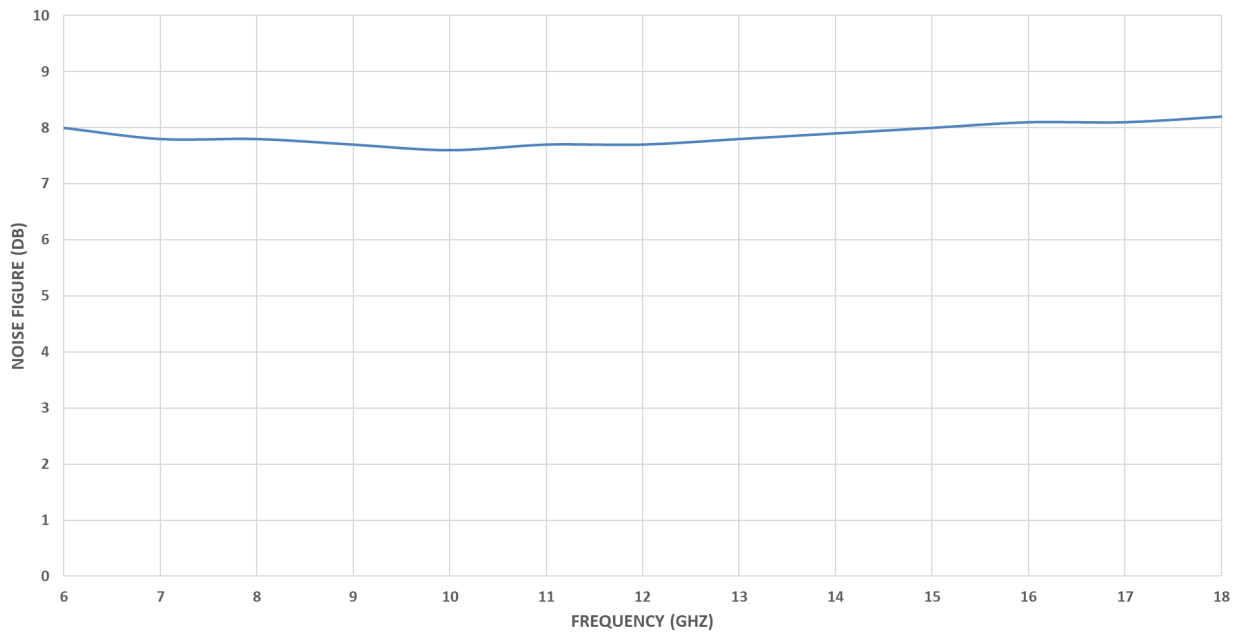

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964
To order AR Products, call: 215.723.8181. For an applications engineer, call: 800.933.8181. Direct to Service call: 215.723.0275 or email: service@arworld.us
For Faxing Orders: 866.859.0582 (Orders Only Please) info@arworld.us
Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 accredited

Revision 121222

